Final Approach

The design system for a top-down air traffic game that looks like a box of toys tipped onto a lawn.

FOUNDATIONS

Principles

1

Outline everything

Every drawn shape carries a thick outline stroke with round joins. No hairlines, no shape without an edge.

2

Flat and bright

Fills are single flat colours. No gradients or textures. Only things that fly get a soft shadow.

3

Toy scale

Sizes are exaggerated, not realistic. A jumbo is nearly twice a light prop.

4

Silhouette before colour

Types, zones and states are told apart by shape first. Colour confirms.

5

The field stays clear

UI lives in small outlined chips at the edges. Nothing covers a landing zone.

FOUNDATIONS

Colour

71 colour tokens in three themes: Day, Night and Dawn. The world is lawn, asphalt and white aircraft; the UI lives in the sky; sun yellow is the signature. Swatches follow the theme switch; values list Day first.

Ink and edges

outline

#1d2545

night #0a0e24

The thick cartoon outline on every drawn shape: aircraft, runways, buttons, panels, HUD chips. Never pure black. Also the colour of hard lip shadows.

ink

#1d2545

Primary text and icons on surface, surface-raised and surface-sunken. The same in both themes: panels stay paper-light at night.

ink-muted

#4f5a7c

Secondary text, captions and hints on surface, surface-raised and surface-sunken.

on-accent

#1d2545

Text and icons on any bright fill: sun, tangerine, cherry, success, sky-500, star and every path colour. Dark in both themes because the fills stay bright.

on-outline

#fffaf0

Text and icons on an outline-coloured fill: coach marks, tooltips, the callsign tag.

on-sky

#1d2545

night #f6f2e4

Text and icons placed straight on bg-sky, sky-100 or sky-300, outside any panel: menu titles, version line.




on-sky-muted

#2f3b63
night #b5bfdd

Secondary text straight on bg-sky, sky-100 or sky-300.


Sky and surfaces



bg-sky

#8fd3fb
night #151c40


Background of menus and every non-gameplay screen. The sky the UI lives in.



sky-100

#e6f6ff
night #1c2654

Quietest backdrop tint on bg-sky: far cloud bank, sunburst rays on menus. Text on it is on-sky.



sky-300

#a9defc
night #2b3a82

Backdrop stripes and near cloud bank on bg-sky. Text on it is on-sky.



sky-500

#4db8f5
night #5aa8f0

Secondary button fill, info status, active toggle track. Text on it is on-accent.



sky-700

#1668ad

Links and emphasised text on surface and surface-raised; lip under sky-500 fills.



surface

#fffaf0
night #efe9d8

Panels, dialogs, level cards and HUD chips. Paper-light in both themes so the outline always reads.



surface-raised

#ffffff
night #fffaf0

A surface sitting on a surface: toggle knobs, the selected segment, score popups.



surface-sunken

#e2eefa
night #cfd6ea

Wells and tracks: toggle track, segmented control trough, empty life slots, locked level art.

Airfield



bg-field

= grass-500

Background of the gameplay viewport: the airfield lawn.



grass-300

#b4e36a
night #5aa57c

Light mowing stripe and grass tufts on the field.



grass-500

#7fcf4b
night #3f8a66

Base lawn colour of the airfield.



grass-700

#5cb337
night #327559

Dark mowing stripe, taxiway verge, bushes.



grass-900

#3b8a2a
night #1f5443

Hedge and tree shade; grass detail next to asphalt.



asphalt-300

#939cb0
night #7a84a6

Runway shoulder and apron wear.

asphalt-500

#6a7389
night #5e6788

Runway, taxiway and helipad surface.

asphalt-700

#474f63
night #454d6b

Tyre marks and the touchdown zone on the runway.

marking

#ffffff
night #eef2fb

Runway centre line, threshold bars, numbers and the helipad H, on asphalt-500 and asphalt-700.

marking-warn

#ffd23f

Helipad ring and hold-short lines, on asphalt-500 and asphalt-700.

Scenery (decoration only)

sand-300

#f2d79b
night #9c9580

Scenery only. Beach, dirt roads and savanna tracks; the farmer's straw hat. Never a UI fill: sun is the signature yellow.

soil-500

#a8713f
night #6e5c52

Scenery only. Ploughed fields, tree trunks, fence and jetty wood.

soil-700

#7d4f2a
night #4d403c

Scenery only. Crop-row furrows and the shaded side of wood, on soil-500.

roof-500

#cf6a4b
night #8c5863

Scenery only. Farmhouse and barn roofs. Not a status colour: danger stays cherry.

foam

#f2fbff
night #b9c8ea

Scenery only. Waves along a shore and the wake behind a boat, on sky-500 water.

stone-300

#b9b3a8
night #8d8fa3

Scenery only. Rocks and the elephant. A warm grey, apart from the blue-grey asphalt.

Accents

sun

#ffcb3d

Primary button fill, score, warning status. The game's signature yellow. Text on it is on-accent.

sun-deep

#e39a12

Lip and pressed shade under sun fills.

tangerine

#ff8f33

Streak badge, highlights, second aircraft livery. Text on it is on-accent.

tangerine-deep

#d9641a

Lip and pressed shade under tangerine fills.

cherry

#ff5d52

Lives, destructive buttons, collision alerts. Text on it is on-accent.

cherry-deep

#c9302c

Lip and pressed shade under cherry fills.

Flight paths and liveries

path-1

= sun

Flight path and livery of the 1st aircraft on screen. Path colours are assigned in order and reused once an aircraft lands.

path-2

= tangerine

Flight path and livery, 2nd aircraft.

path-3

= cherry

Flight path and livery, 3rd aircraft.

path-4

#ff7ac8

Flight path and livery, 4th aircraft. Bubblegum.

path-5

#b48cff

Flight path and livery, 5th aircraft. Grape.

path-6

#4fe0e6

Flight path and livery, 6th aircraft. Lagoon.

Status

success

#35d6b0

Safe landing, valid landing zone glow, confirmations. A teal, not a green, so it reads on the lawn and stays apart from cherry for colour-blind players. Always paired with a check icon or a word. Text on it is on-accent.

success-ink

#0b6b59

Success text on surface and surface-raised.

danger

= cherry

Collision, miss, wrong landing zone. Always paired with a warning icon or a word.

danger-ink

#b3221f

Danger text on surface and surface-raised.

warning

= sun

Near-miss warning ring between two aircraft.

info

= sky-500


Neutral hints: next-aircraft arrow, tutorial pulses.



focus

#ffffff

Inner band of the two-tone focus ring: 3px focus, then 3px outline outside it. One of the two bands always holds 3:1 against whatever the ring lands on.



zone-ok

= success

Glow on a runway or helipad while the path end is a valid landing.



zone-no

= cherry

Glow on a landing zone of the wrong type for the selected aircraft.

Aircraft and sky objects




fuselage

#fdfcf5
night #f1f3fa



fuselage-shade

#d5dbe8
night #b4bcd2



glass

#9fe0ff
night #8fd0ff



glass-shine

#ffffff



prop-blur

rgba(29, 37, 69, 0.3)
night rgba(223, 230, 245,



cloud

#ffffff
night #a9b5d6

Aircraft body white.


Engines, nacelles and the shaded side of the fuselage.

Cockpit windows. Keep them big.

The single highlight streak on a cockpit window.

0.3)
Translucent disc of a spinning rotor.

Ambient drifting clouds above the field, drawn at opacity-cloud.



cloud-shade

#d6ebfa
night #7f8cb3
Underside of clouds.



shadow-ground

rgba(24, 40, 30, 0.28)
night rgba(4, 7, 18, 0.5)
The soft shadow an aircraft or cloud casts on the ground.



select-ring

#ffffff
night #ffe98a
Dashed ring around the selected aircraft. Always drawn over an outline-coloured casing, like the flight path.



star

#ffe066
Star burst on a safe landing; streak sparkles.



poof

#f7f8fc
night #dfe4f2
Comic poof cloud on a collision.



poof-shade

#c8d1e6
night #9aa5c4
Shaded lobes of the poof.



scrim

rgba(17, 24, 58, 0.55)
night rgba(3, 5, 16, 0.7)
Dims the field behind the pause and game-over dialogs.

Sunset (splash page only)



sunset-sky-top

#a82a2a



sunset-sky-upper

#d4481f



sunset-sky-lower

#f0731f



sunset-sky-horizon

#ffa23a



sunset-sun

#ffe08a



sunset-silhouette

#2a1630

Splash page only. Top band of the sunset sky: the deepest, reddest orange.

Splash page only. Second band of the sunset sky.

Splash page only. Third band of the sunset sky.

Splash page only. Glowing band at the horizon, behind the airport silhouette.

Splash page only. The low sun, partly behind the silhouette, on sunset-sky-lower and sunset-sky-horizon.

Splash page only. The airport silhouette and the ground it stands on. A dark plum, not black.

sunset-tower-light

#ffe9a8

Splash page only. The lit window of the control tower cab, on sunset-silhouette.

Dawn (levels before sunrise)

The Dawn theme dims and warms the ground, the strips, the sky and the clouds. Panels, chips, text and aircraft keep their Day values. These swatches always show Dawn.

bg-sky

#6c6a92

Background of menus and every non-gameplay screen. The sky the UI lives in.

bg-field

grass-500

The Dawn field: grass-500 of Dawn.

surface

#f4ebd8

Panels, dialogs, level cards and HUD chips. Paper-light in both themes so the outline always reads.

sky-100

#3a3d6b

Quietest backdrop tint on bg-sky: far cloud bank, sunburst rays on menus. Text on it is on-sky.

sky-300

#55578a

Backdrop stripes and near cloud bank on bg-sky. Text on it is on-sky.

grass-300

#a29c5f

Light mowing stripe and grass tufts on the field.



grass-500

#8a8650

Base lawn colour of the airfield.



grass-700

#726f42

Dark mowing stripe, taxiway verge, bushes.



grass-900

#4f4d30

Hedge and tree shade; grass detail next to asphalt.



asphalt-300

#7c8298

Runway shoulder and apron wear.



asphalt-500

#585e73

Runway, taxiway and helipad surface.



asphalt-700

#3b4156

Tyre marks and the touchdown zone on the runway.

marking

#e9e6e2

Runway centre line, threshold bars, numbers and the helipad H, on asphalt-500 and asphalt-700.

cloud

#d9b8c4

Ambient drifting clouds above the field, drawn at opacity-cloud.

cloud-shade

#a98ca8

Underside of clouds.

shadow-ground

rgba(20, 22, 30, 0.353)

The soft shadow an aircraft or cloud casts on the ground.

sand-300

#c4ad85

Scenery only. Beach, dirt roads and savanna tracks; the farmer's straw hat. Never a UI fill: sun is the signature yellow.

soil-500

#86603f

Scenery only. Ploughed fields, tree trunks, fence and jetty wood.

soil-700

#5f432c

Scenery only. Crop-row furrows and the shaded side of wood, on soil-500.

Lights (Dawn levels only)

Small glows on Dawn levels. Light is gentle: no light is brighter than light-max-opacity (0.6) and none cycles faster than dur-light-min.

light-nav-red

#ff4d4d

Dawn levels only. The red navigation light on the left wingtip of an airborne airplane.

light-nav-green

#3ddc84

Dawn levels only. The green navigation light on the right wingtip of an airborne airplane.

light-white

#ffffff

Dawn levels only. The white tail light of an airborne airplane.

light-beacon

#fff3b0

Dawn levels only. The flashing beacon on top of the control tower, and the landing light on the nose of an airborne airplane.

light-agl

#ffe9a8

Dawn levels only. Airfield ground lights: the runway lights and the running light that sweeps along a runway.

roof-500

#a85f4c

Scenery only. Farmhouse and barn roofs. Not a status colour: danger

stone-300

#a39c96

Scenery only. Rocks and the elephant. A warm grey, apart from the blue-grey asphalt.

FOUNDATIONS

Type

DynaPuff for headers, titles, buttons and the score. Inconsolata for regular text, labels and readouts.

Display · DynaPuff

Final Approach

display-xl · 72px/68px · 700 · -0.01em — The game title on the splash and main menu only.

Game over

display-lg · 48px/48px · 700 — Dialog headlines: Paused, Game over, Cleared to land.

Nice landing!

display-md · 36px/40px · 700 — Screen titles and the final score.

12 450

score · 32px/32px · 700 — The live score in the HUD and score popups. Thin space as thousands separator.

12 450

score-compact · 24px/24px · 700 — The compact Score Counter in the HUD: the best score. Thin space as thousands separator.

Titles · DynaPuff

Choose an airport

title-lg · 28px/32px · 600 — Section headings in menus.

Meadow Field

title-md · 22px/28px · 600 — Card titles, level names.

Sound effects

title-sm · 18px/24px · 600 — Settings rows, small headings.

Play

button-label-lg · 24px/28px · 700 — Label of the large button: the main call to action on a menu.

Take off

button-label · 18px/20px · 600 — Labels of medium buttons.

Retry

button-label-sm · 15px/18px · 600 — Labels of small buttons, segments and chips.

Text · Inconsolata

Tap an aircraft, then drag to draw its path.

body-lg · 18px/28px · 500 — Tutorial copy and dialog lead text.

Planes land on runways. Helicopters land on helipads.

body · 16px/24px · 500 — All regular text. Never lighter than 500: thin strokes look weak beside the outlines.

Two aircraft got too close.

body-sm · 14px/20px · 500 — Supporting text in cards and toasts.

Best 18 200

caption · 12px/16px · 600 — Metadata under titles.

Readouts · Inconsolata

x3 STREAK

readout · 20px/24px · 800 — Numbers that change while you watch: streak multiplier, countdowns, stats.

NEXT UP

label · 13px/16px · 800 · 0.08em — Uppercase eyebrow labels above HUD values and settings groups. Write them in capitals.

FA 204

callsign · 12px/14px · 800 · 0.04em — The tag that follows a selected aircraft. Uppercase letters and digits.

FOUNDATIONS

Shape and depth

Spacing

TOKEN	VALUE	SCALE	USE
space-1	4px		Gap between an icon and its label; hearts in the lives meter.
space-2	8px		Inner padding of chips and HUD pills; gap between segments.
space-3	12px		Gap between HUD items; small button padding.
space-4	16px		HUD inset from the screen edge; card padding; default gap.
space-5	24px		Panel padding; gap between dialog buttons and copy.
space-6	32px		Dialog padding; gap between menu sections.
space-7	48px		Vertical rhythm on the main menu.
space-8	64px		Title block offset on splash and game over.

Radius

TOKEN	VALUE	CORNER	USE
radius-sm	8px		Chips, callsign tag, small tiles.
radius-md	14px		Buttons, icon buttons, HUD chips.
radius-lg	22px		Panels and level cards.
radius-xl	32px		Dialogs.
radius-pill	999px		Toggles, the streak badge, score popups, path dash caps.

Lines and flight path

TOKEN	VALUE	STROKE	USE
line-fine	1.5px		Scenery only. Detail strokes inside a scenery sprite: patches, windows, roof ribs, crop rows, leaf clusters. The thinnest stroke in the system.
line-1	2px		Detail strokes inside a shape: window shine, runway dashes, grass tufts.
line-2	3px		Outline of small UI: chips, toggles, icons at 24px.

TOKEN	VALUE	STROKE	USE
line-3	4px		The default outline: aircraft, buttons, panels, runways.
line-4	6px		Outline of display type and of dialogs.
path-stroke	8px		Width of the coloured flight path dash.
path-casing	14px		Width of the outline-coloured casing drawn under the flight path.
path-dash	18px		Dash length of the flight path.
path-gap	16px		Gap between flight path dashes.
path-dot	22px		Diameter of the end dot of a flight path.
warn-ring-dash	10px		Dash length of the proximity warning ring.
warn-ring-gap	8px		Gap between proximity warning ring dashes.

Shadows

TOKEN	VALUE	DEPTH	USE
shadow-lip-sm	0 3px 0 #1d2545		Hard lip under chips and small buttons. No blur: this is the toy-block edge.
shadow-lip	0 5px 0 #1d2545		Hard lip under buttons and HUD chips. Pressing a control collapses it to shadow-lip-sm and moves the control down by the difference.

TOKEN	VALUE	DEPTH	USE
shadow-lip-lg	0 8px 0 #1d2545		Hard lip under panels, cards and dialogs.
shadow-soft	0 10px 0 rgba(29, 37, 69, 0.16)		Second, translucent lip that grounds a dialog on the scrim.
shadow-float	6px 10px 6px rgba(24, 40, 30, 0.28)		The soft ground shadow of anything airborne: aircraft, clouds, score popups. Offset down-right, as if the sun sits top-left.
shadow-well	inset 0 3px 0 rgba(29, 37, 69, 0.14)		Inner top edge of sunken wells: toggle track, segmented trough.

Sizes

TOKEN	VALUE	USE
touch-min	48px	Minimum touch target for any control.
touch-aircraft	72px	Minimum pick diameter around an aircraft, however small it is drawn.
hud-chip	56px	Height of HUD chips and icon buttons in the HUD.
button-sm	40px	Height of small buttons (48px touch target with its margin).
button-md	52px	Height of default buttons.
button-lg	64px	Height of the main menu call to action.

TOKEN	VALUE	USE
`icon-sm`	20px	Icons inside chips and small buttons.
`icon-md`	28px	Icons inside buttons and HUD chips.
`icon-lg`	40px	Icons in coach marks and empty states.
`sprite-light-prop`	56px	Drawn size of the light prop at 1x viewport scale.
`sprite-helicopter`	64px	Drawn size of the helicopter, rotor disc included.
`sprite-turboprop`	68px	Drawn size of the turboprop.
`sprite-jet`	72px	Drawn size of the jet.
`sprite-jumbo`	104px	Drawn size of the jumbo. Exaggerated on purpose.
`sprite-light-prop-side`	116px	Length, nose to tail, of the side-view light prop that tows the banner on the splash page.
`tow-line`	44px	Length of the tow line between the side-view airplane and the banner.
`warn-ring-margin`	10px	Gap between an aircraft's collision outline and its proximity warning ring.
`level-tile`	168px	Side of the square level card on the level select page.
`level-tile-art`	120px	Height of the layout miniature inside a square level card.

opacity

TOKEN	VALUE	SAMPLE	USE
`opacity-disabled`	0.45		Disabled controls and locked levels.

TOKEN	VALUE	SAMPLE	USE
opacity-cloud	0.85		Ambient clouds, so aircraft stay readable beneath them.
opacity-path-idle	0.7		Paths of aircraft that are not selected.
opacity-ghost	0.5		The straight-on projection drawn past a path end.
light-max-opacity	0.6		The brightest any Dawn light may get: light is a gentle glow, never a flash.

Layers

TOKEN	VALUE	USE
z-field	0	Lawn, runways, helipads, ground decoration.
z-zone	10	Landing zone glows.
z-path	20	Flight paths and end dots.
z-ground-shadow	30	Aircraft shadows, all below every aircraft.
z-aircraft	40	Aircraft, selection ring, callsign tag.
z-fx	50	Star bursts, poofs, score popups.
z-clouds	60	Ambient clouds.
z-hud	70	HUD and coach marks.

TOKEN	VALUE	USE
z-overlay	80	Scrim and dialogs.

FOUNDATIONS

Motion

Bouncy and short. Things arrive with one overshoot, controls snap, and the world never stops moving a little.

Easing

TOKEN	VALUE	FEEL	USE
`ease-bounce`	`cubic-bezier(0.34, 1.56, 0.64, 1)`		Anything arriving: pop-ins, dialog drop, selection ring. Overshoots once.
`ease-snap`	`cubic-bezier(0.2, 0.9, 0.3, 1)`		State changes of controls: press, toggle, segment slide.
`ease-out-soft`	`cubic-bezier(0.16, 1, 0.3, 1)`		Things leaving or fading: score popups rising, poof clearing.
`ease-sway`	`cubic-bezier(0.45, 0, 0.55, 1)`		Ambient back-and-forth: windsock, idle bob.

Duration

TOKEN	VALUE	USE
`dur-press`	`90ms`	Button press and release.
`dur-quick`	`160ms`	Toggles, segment changes, selection ring appearing.

TOKEN	VALUE	USE
dur-pop	280ms	Pop-in of chips, popups and coach marks.
dur-land	420ms	Squash-and-stretch on touchdown before the aircraft disappears.
dur-burst	600ms	Star burst and comic poof.
dur-dialog	360ms	Dialog drop-in.
dur-rotor	240ms	One rotor or propeller revolution. Linear, endless.
dur-march	900ms	One dash-length of flight path marching towards the end dot.
dur-sway	2400ms	One windsock wave.
dur-drift	48s	A cloud crossing the viewport.
dur-ring-spin	4s	One turn of the proximity warning ring. Linear, endless; static with reduced motion.
dur-light-min	500ms	The fastest any Dawn light may cycle. No light blinks faster than this.
dur-beacon	1600ms	One full flash of the control tower beacon on Dawn levels.
dur-running-light	1200ms	One sweep of the running light along a runway on Dawn levels.

BRAND

App icon

The sun-yellow jet climbing off the mown lawn, trailing its dashed flight path. Built only from system parts.



Rounded preview



Android adaptive, circle



Android adaptive, squircle



iOS mask




64 and 40px

ASSETS

Icons

21 glyphs on a 24px grid with 3px round strokes. They take the text colour.

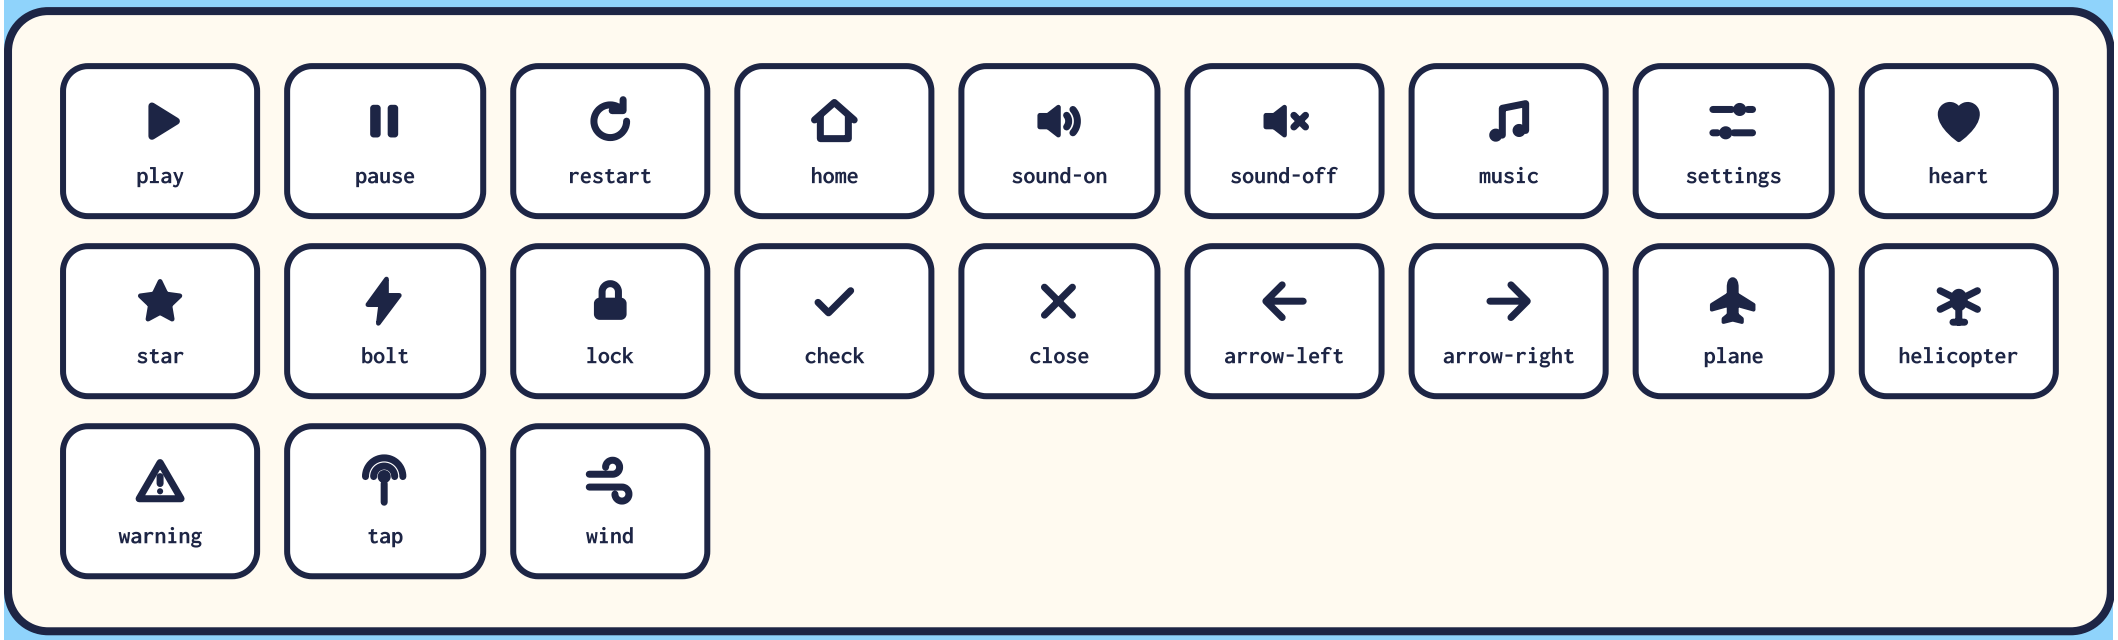

ASSETS

Aircraft

Five flying toys on a 96-unit square. Drawn size grows with how hard each is to handle.

SPRITE	TYPE	SPEED	TURN RATE	LANDS ON	DRAWN SIZE
	**Light prop**	Slow	High	Runway	**56px**
	**Turboprop**	Medium	Medium	Runway	**68px**
	**Jet**	Fast	Low	Runway	**72px**
	**Jumbo**	Medium-fast	Very low	Runway	**104px**
	**Helicopter**	Slow	Very high	Helipad	**64px**

ASSETS

Scenery

Everything on the ground that is not a landing zone: buildings, vehicles, plants, animals and boats. Drawn top-down, front up, finer than the aircraft so it never competes with them.

- Outline `line-2`, inner details `line-fine`: always lighter than an aircraft, which keeps `line-3`.
- At most 4 fill colours in one sprite, counting `outline` used as a fill: no more than the light prop.
- Never a path colour, `sun` or the `fuselage` white. Only the tower cab (`cherry`) and the windsock (`tangerine`) keep an accent.
- No airborne shadow. A tree may lie on a flat `grass-900` shade; nothing else has one.
- On an 800 by 360 phone: animals, people and vehicles at least 20dp long, a bird at least 16dp across, no detail under 3dp.
- A parked aircraft is three quarters of the light prop, in `fuselage-shade`, and stands only on an apron.
- Scenery never covers a runway, a helipad or a landing zone, and only flat ground lies under the HUD band.

Day, enlarged twice

MEADOW



Cow



Farmer



Bird, wings out




Bird, wings in




Tree




Hedge (one piece of a row)




Fence (one piece of a row)

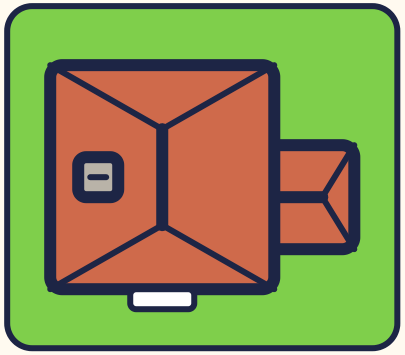

Farmhouse

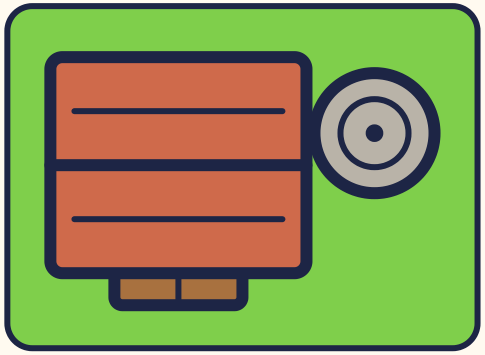


Barn



Crop field (one tile)


AIRFIELD

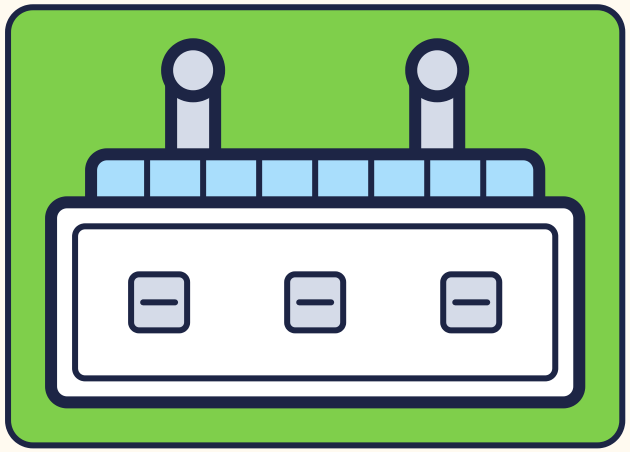

Terminal



Control tower

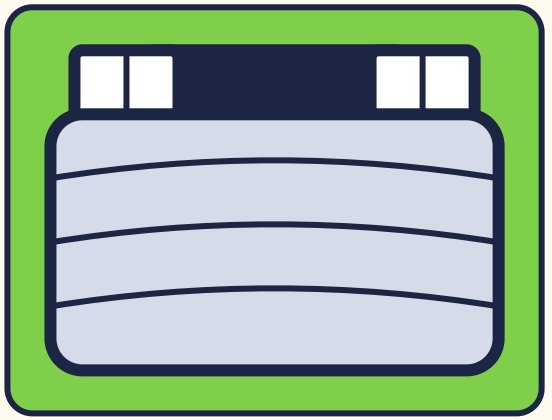


Hangar




Windsock




Car



Fuel truck




Baggage cart




Parked aircraft


ISLAND




Palm




Jetty

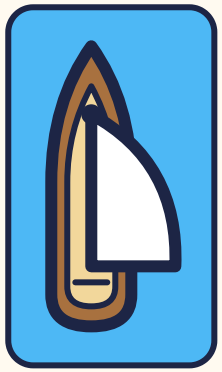

Sailboat

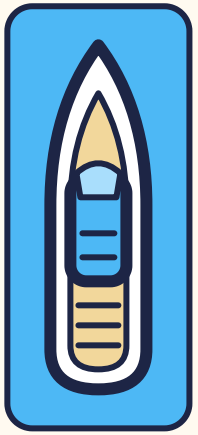


Yacht

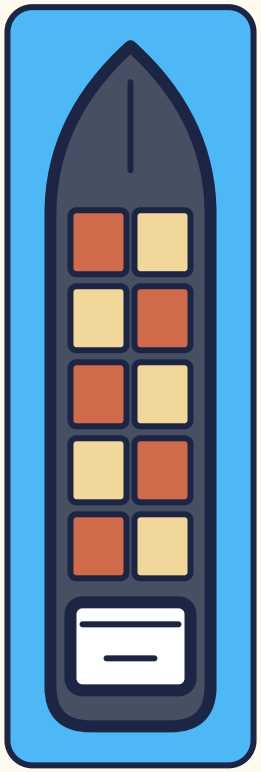

Container vessel




Wake



Wave

SAVANNA

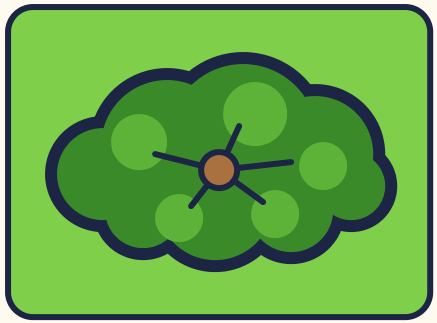


Acacia




Bush



Rock



Zebra

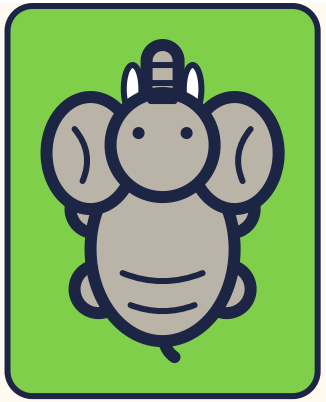

Elephant

Day, at placed size beside the light prop



Light prop (in play)



Cow



Farmer



Bird, wings out




Bird, wings in




Tree




Hedge (one piece of a row)



Fence (one piece of a row)




Farmhouse



Barn



Crop field (one tile)



Terminal



Control tower



Hangar



Windsock



Night, enlarged twice

MEADOW



Cow



Farmer



Bird, wings out




Bird, wings in




Tree




Hedge (one piece of a row)



Fence (one piece of a row)

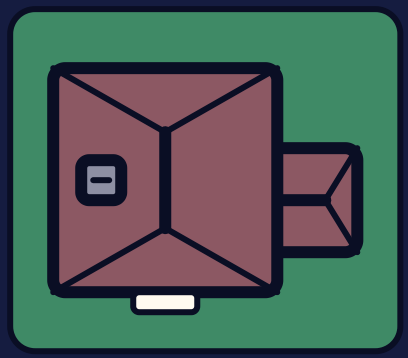

Farmhouse

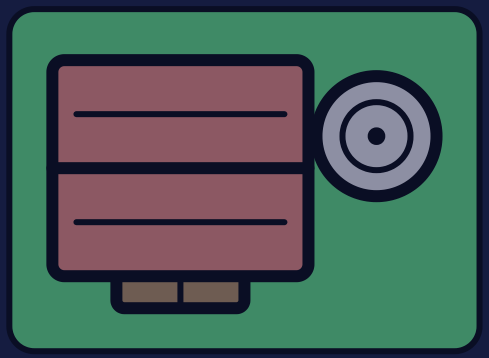


Barn



Crop field (one tile)


AIRFIELD

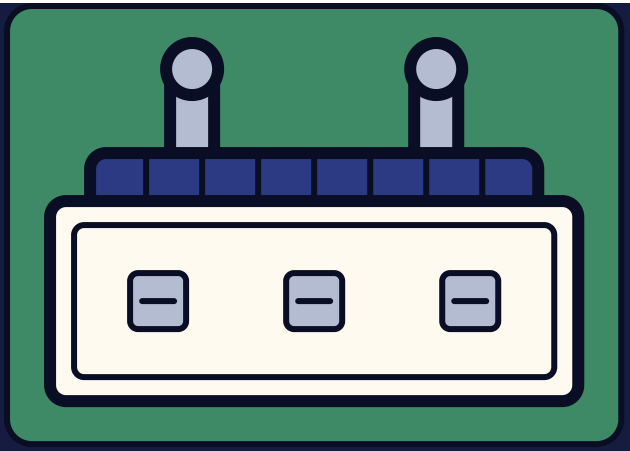

Terminal



Control tower

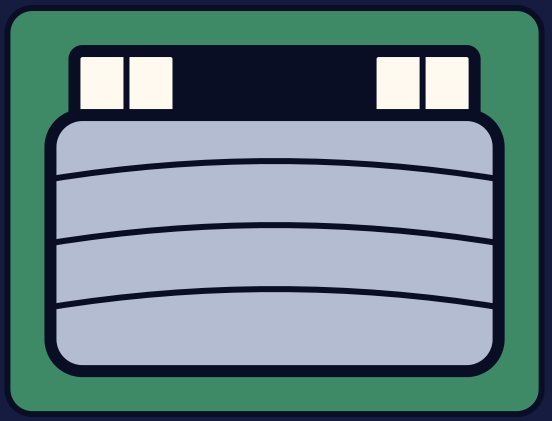


Hangar




Windsock



Car

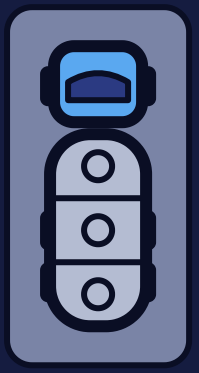

Fuel truck

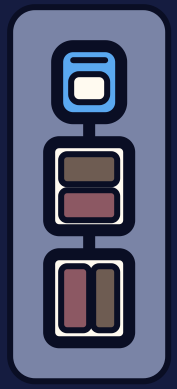


Baggage cart




Parked aircraft

ISLAND

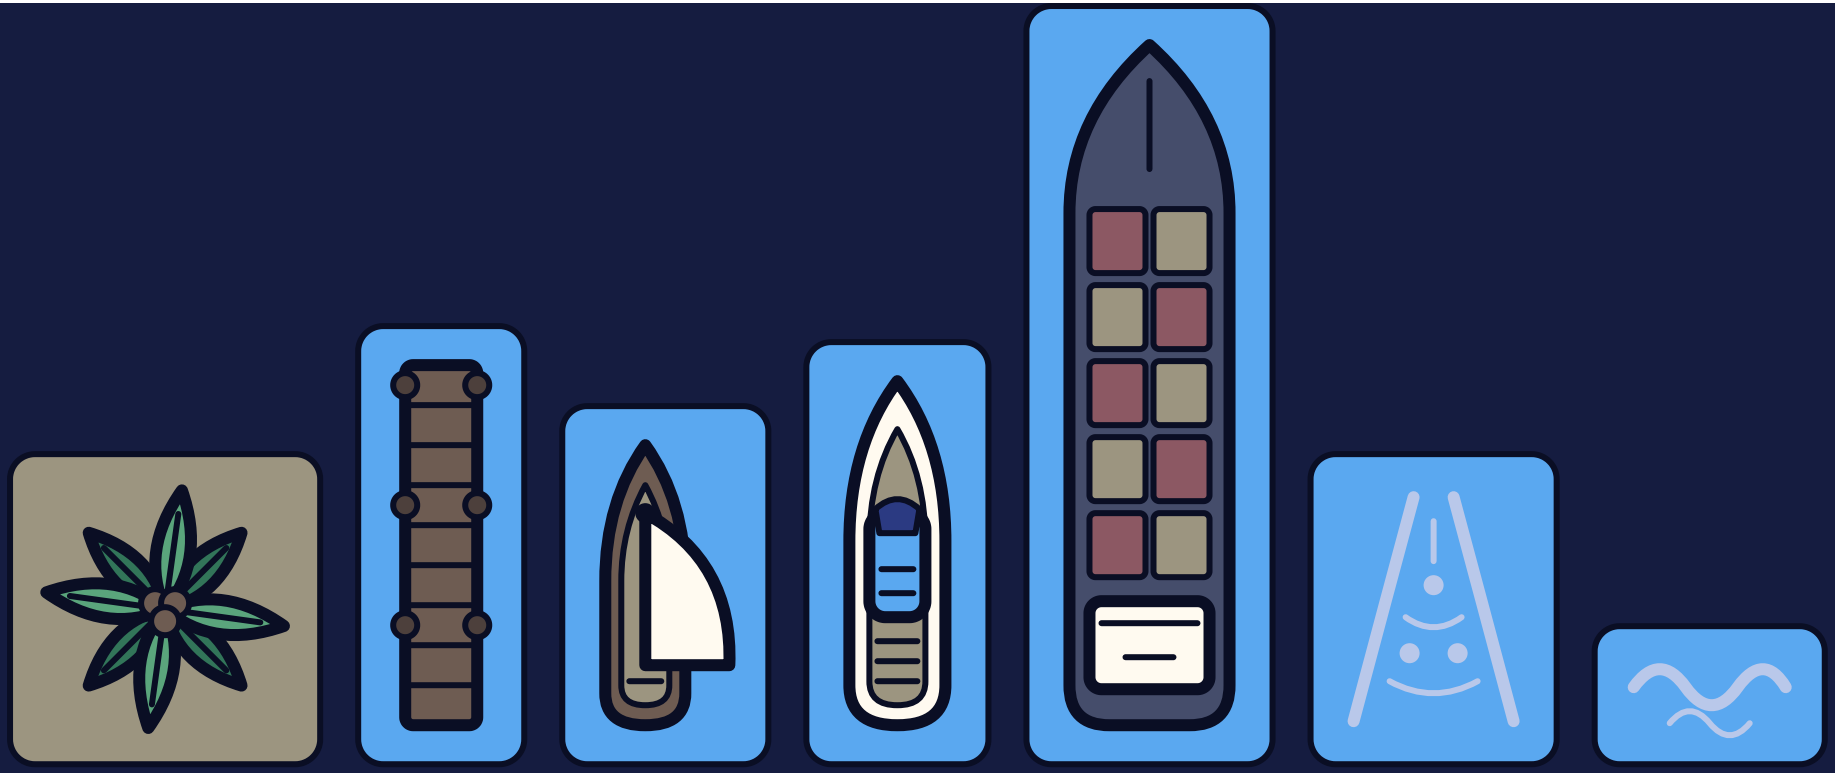
Palm
Jetty
Sailboat
Yacht
Container vessel
Wake
Wave

SAVANNA

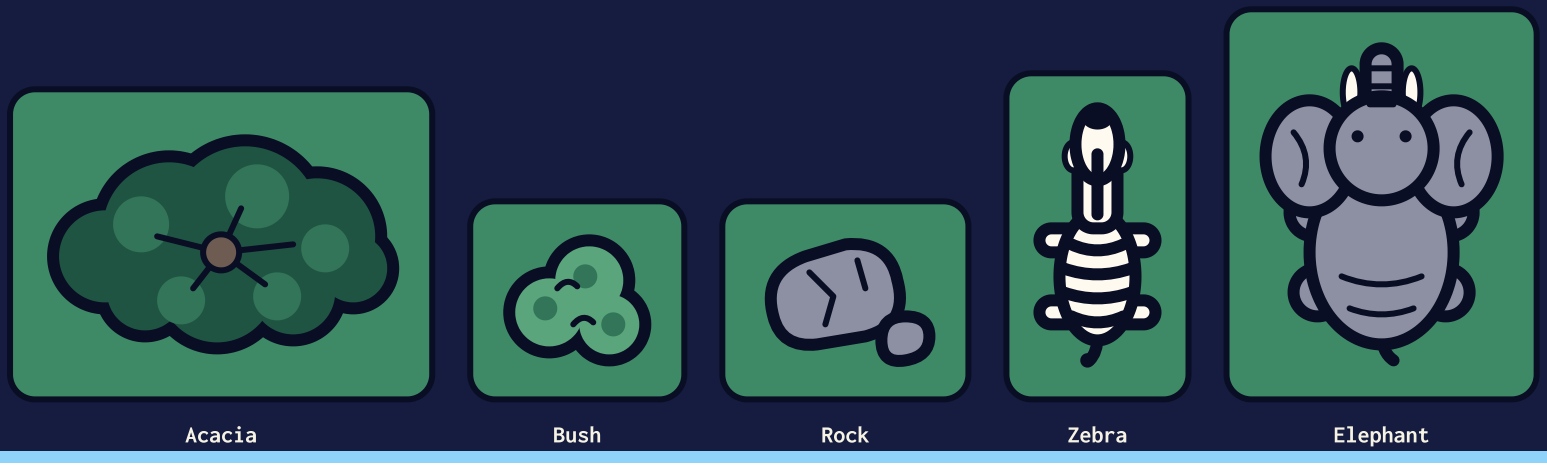

Acacia
Bush
Rock
Zebra
Elephant

Components

Actions

Button

The chunky toy-block button for every text action in menus and dialogs.

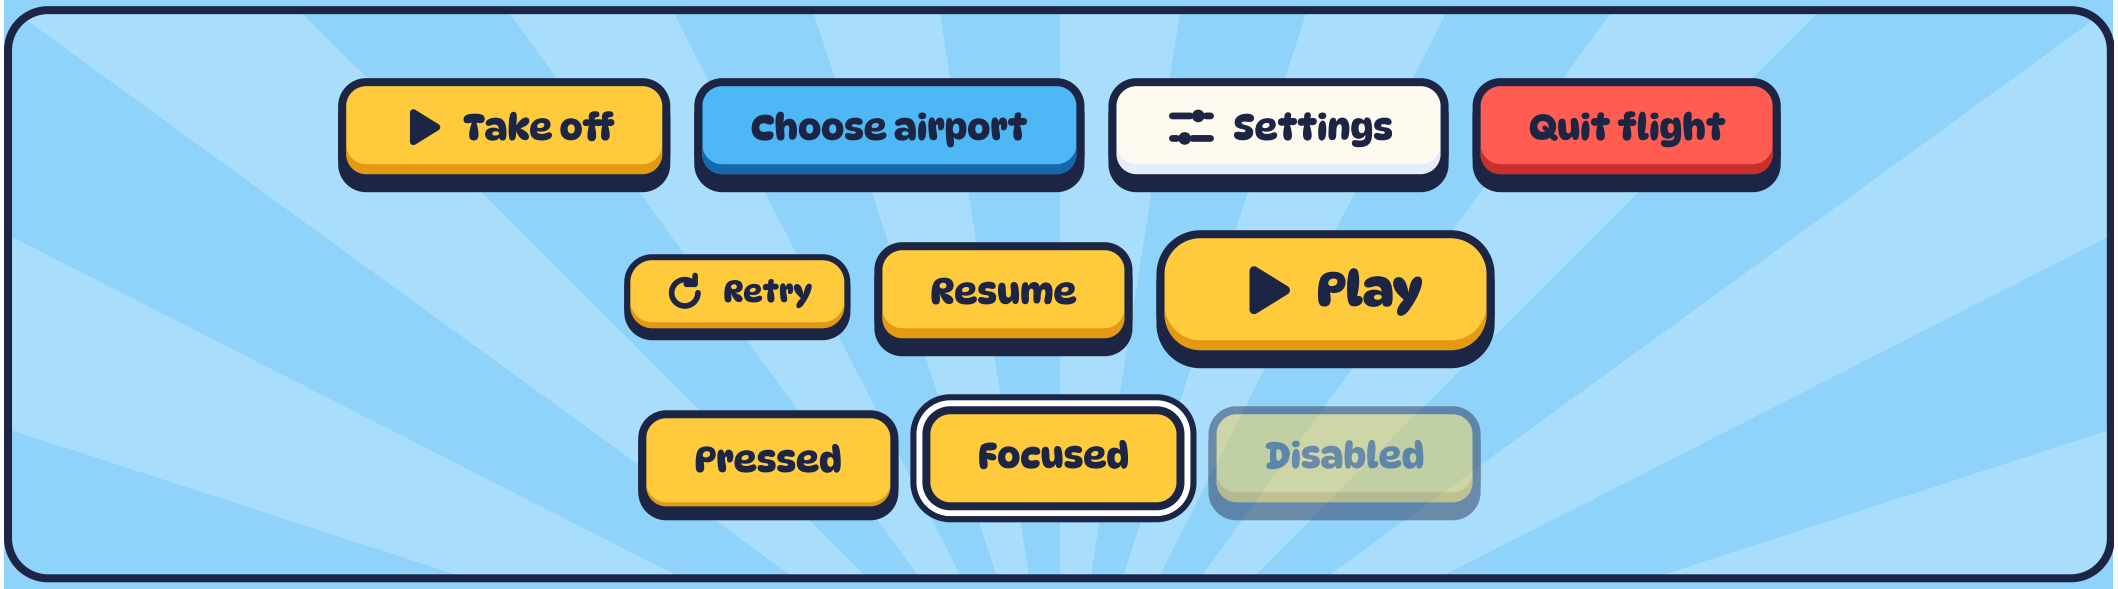


Icon Button

A square button that carries one icon and no text, used in the HUD and for close and back.




Toggle

An on/off switch for settings that apply immediately.

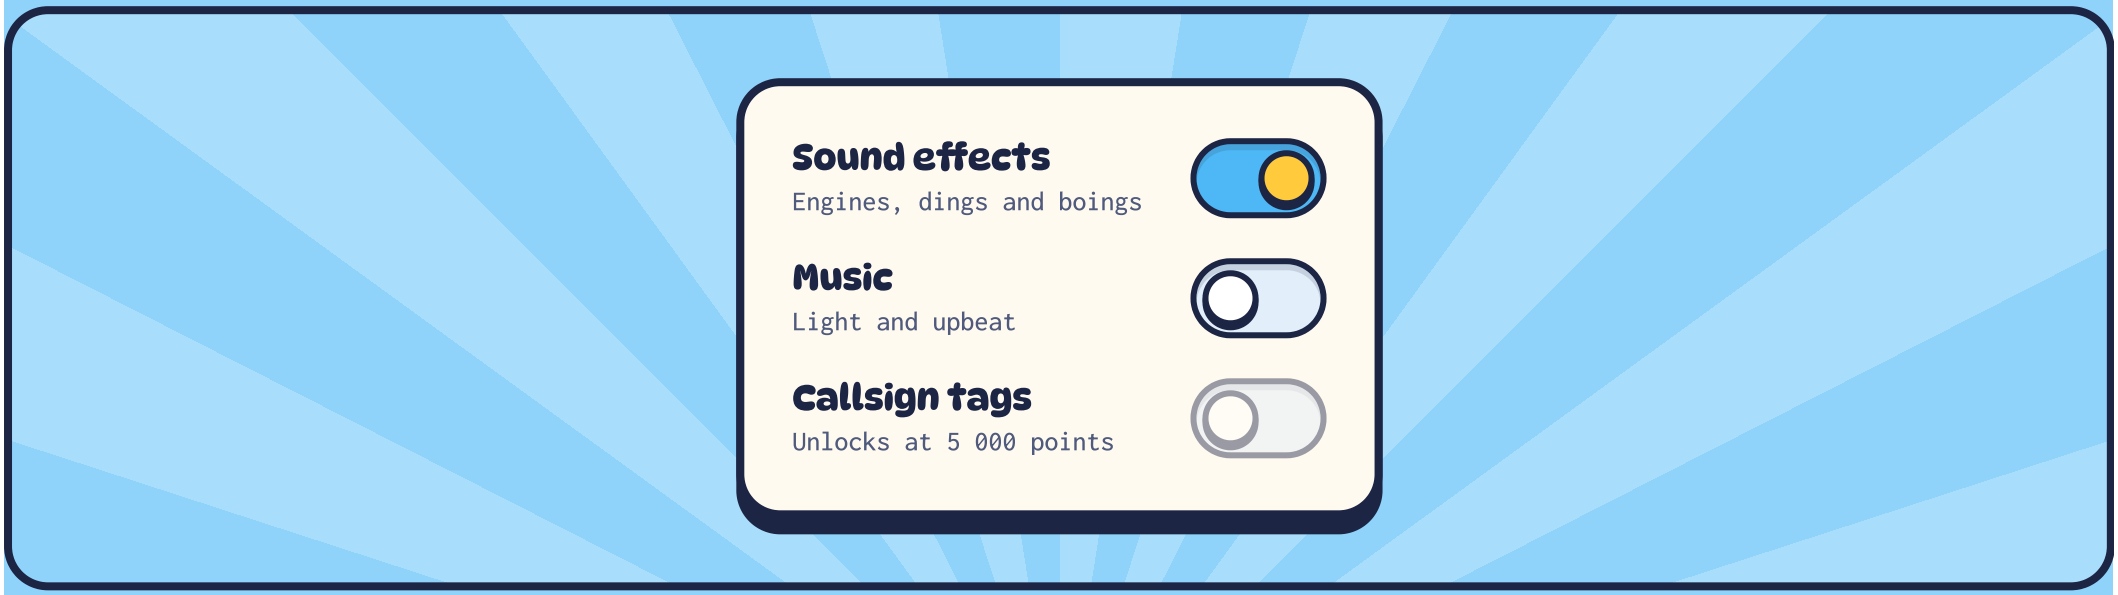


Segmented Control

A row of two to four mutually exclusive choices, one always selected.

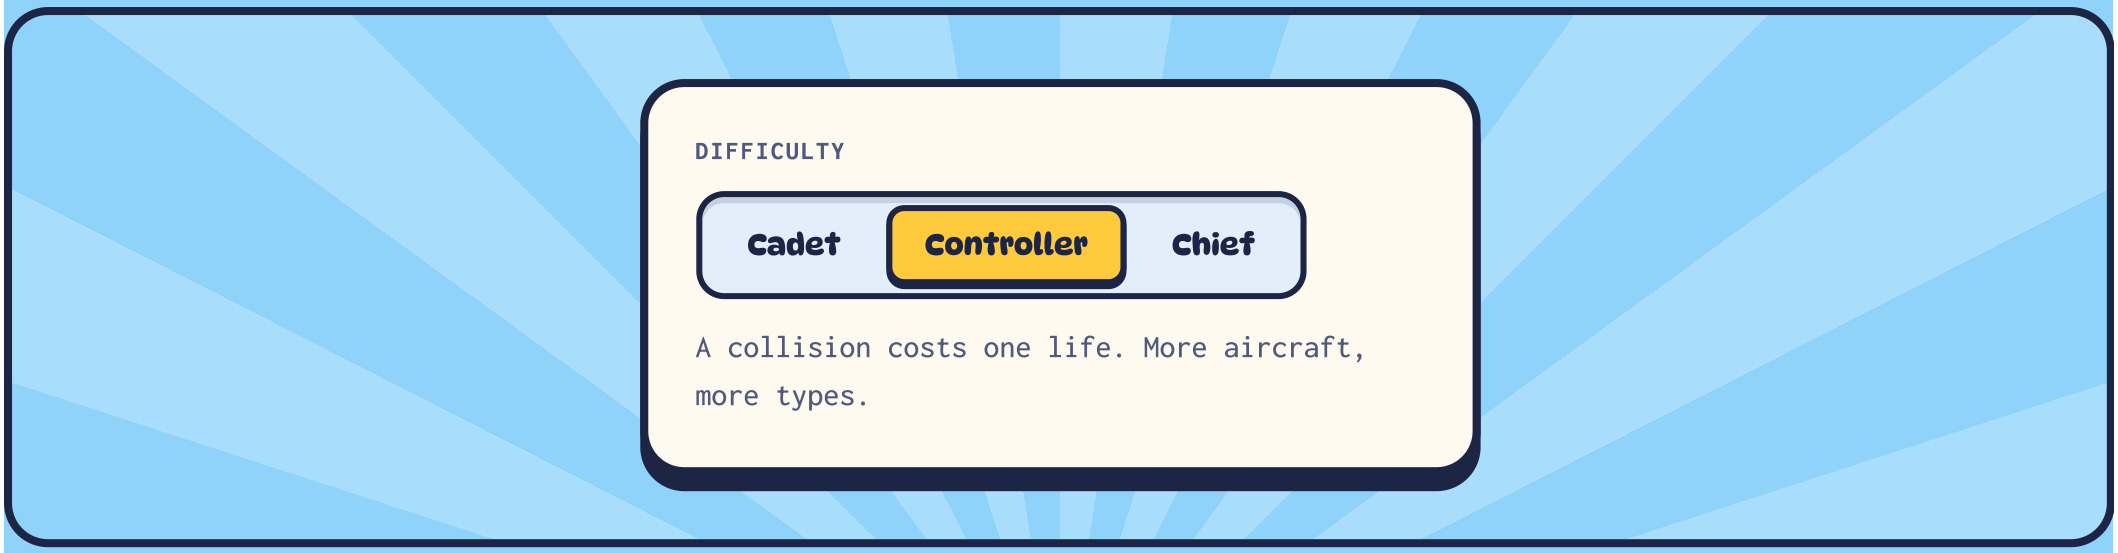

Chip

A small outlined tag that names a property: aircraft type, speed class, landing zone, lock state.

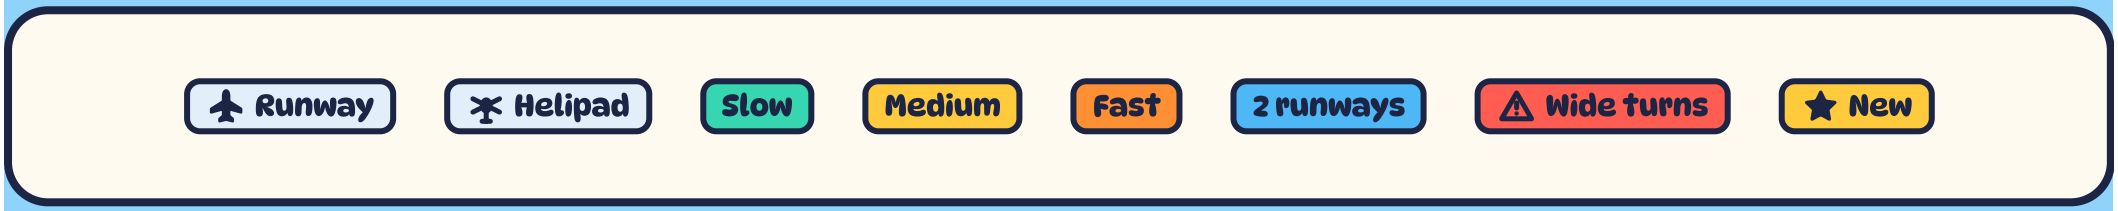

HUD

Hud Bar

The gameplay overlay: score and streak on the left, next aircraft, lives and pause on the right.



Score Counter

The live score in a HUD chip.



Spawn Counter

How many aircraft of one type have spawned in the running level, in a HUD chip.



Lives Meter

Remaining lives as a row of hearts.



Next Aircraft Hint

A HUD chip that previews the next aircraft and the edge it will enter from.



Streak Badge

A tilted pill that shows the current landing streak multiplier.



Score Popup

A short-lived pill that rises from the place something happened on the field.



World

Aircraft


The five flying toys, drawn top-down with the nose pointing up at heading 0.






Flight Path

The dashed line a player draws from an aircraft to where it should go.

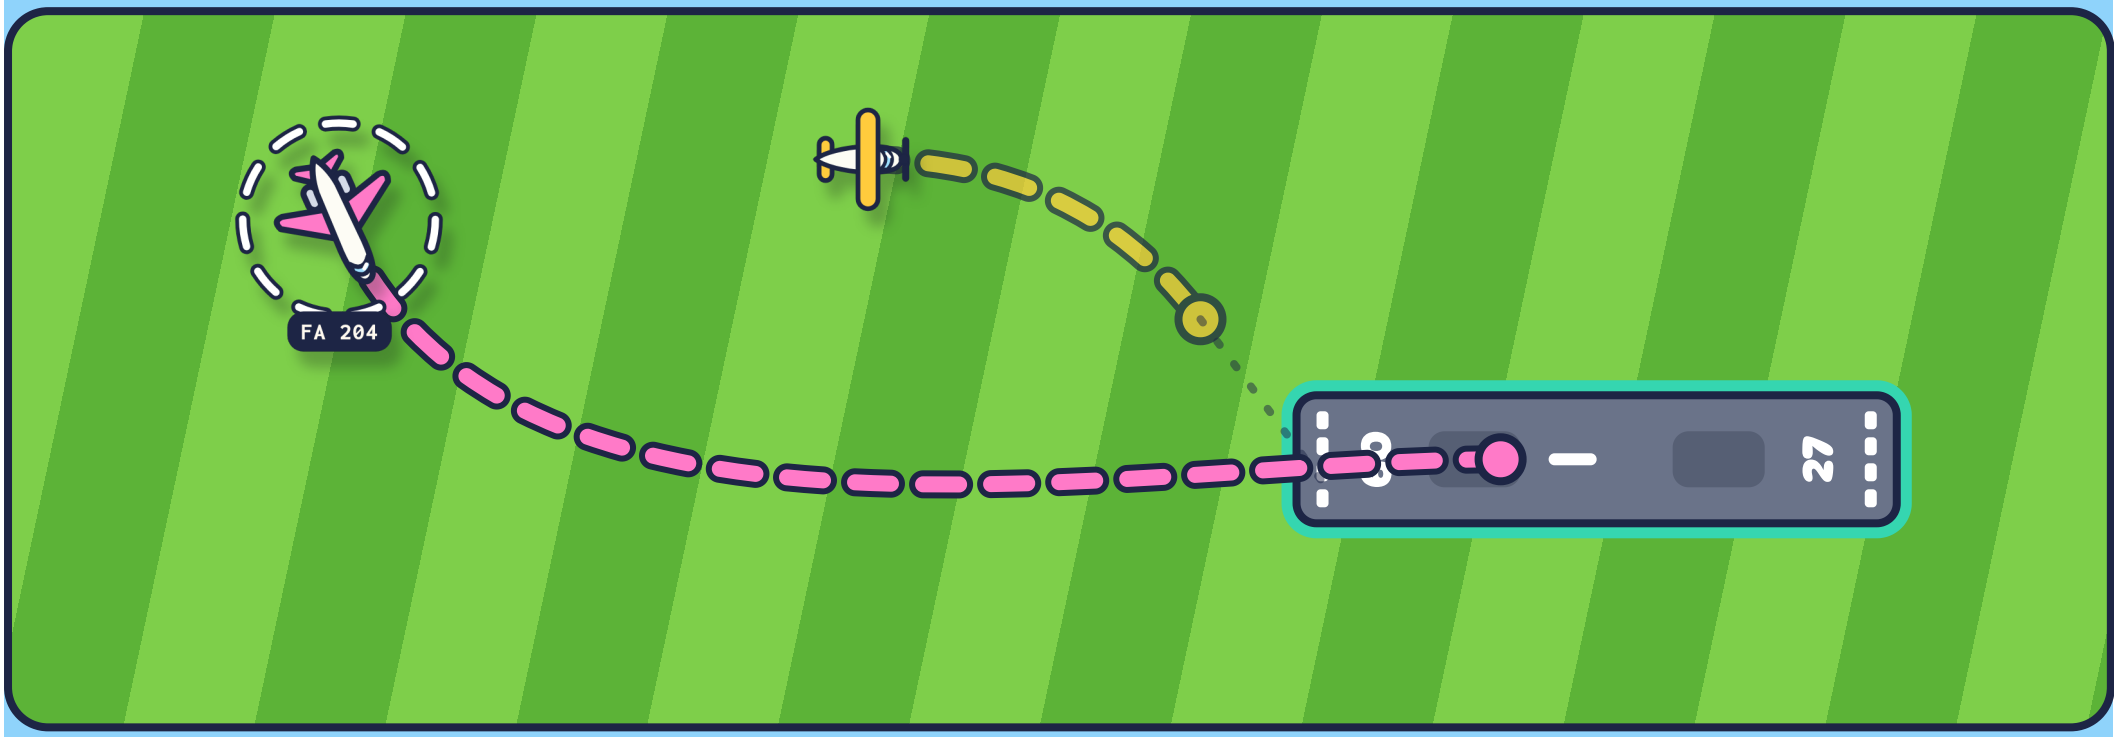

Runway

A landing strip for airplanes, defined by position, heading, length and its two numbers.

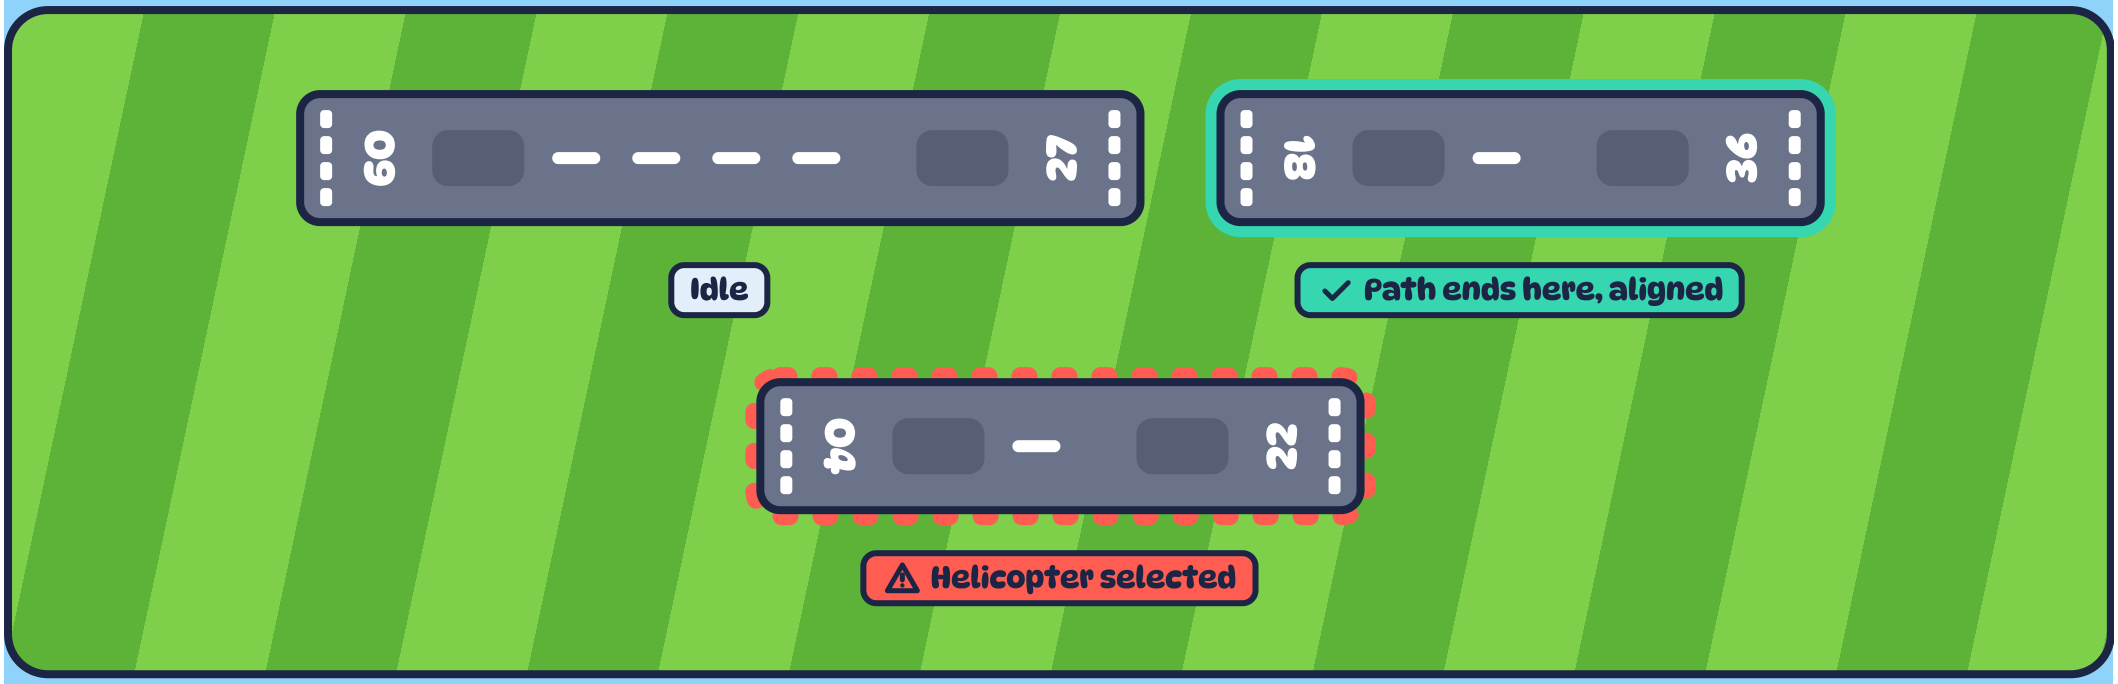

Helipad

A round landing spot for helicopters.




Cloud

An ambient cloud that drifts across the field above the aircraft.



Windsock

A striped windsock beside the runway, waving.

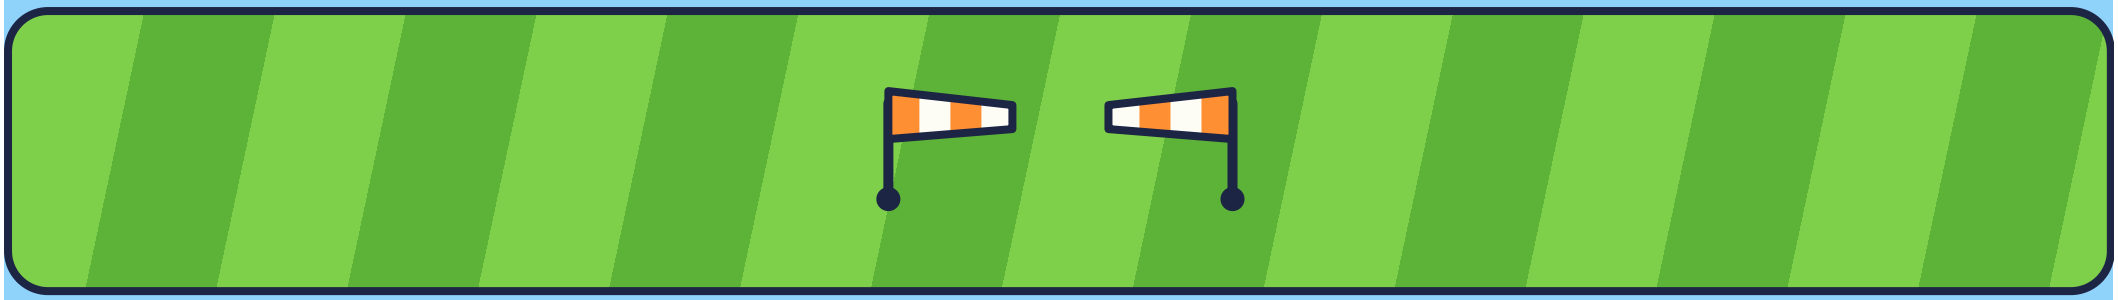

Effects

The three feedback animations that tell the player what just happened.



Proximity ring

A slowly spinning dashed red ring around every aircraft that is too close to another one. A warning, not a failure: they have not touched yet.



Menus

Panel

A paper-light container for grouped content in menus.

How to play



Tap an aircraft to select it.




Drag to a runway. Planes need to line up with it.



Helicopters land on the H.

Dialog

A modal that stops the game: paused, game over, quit confirmation.

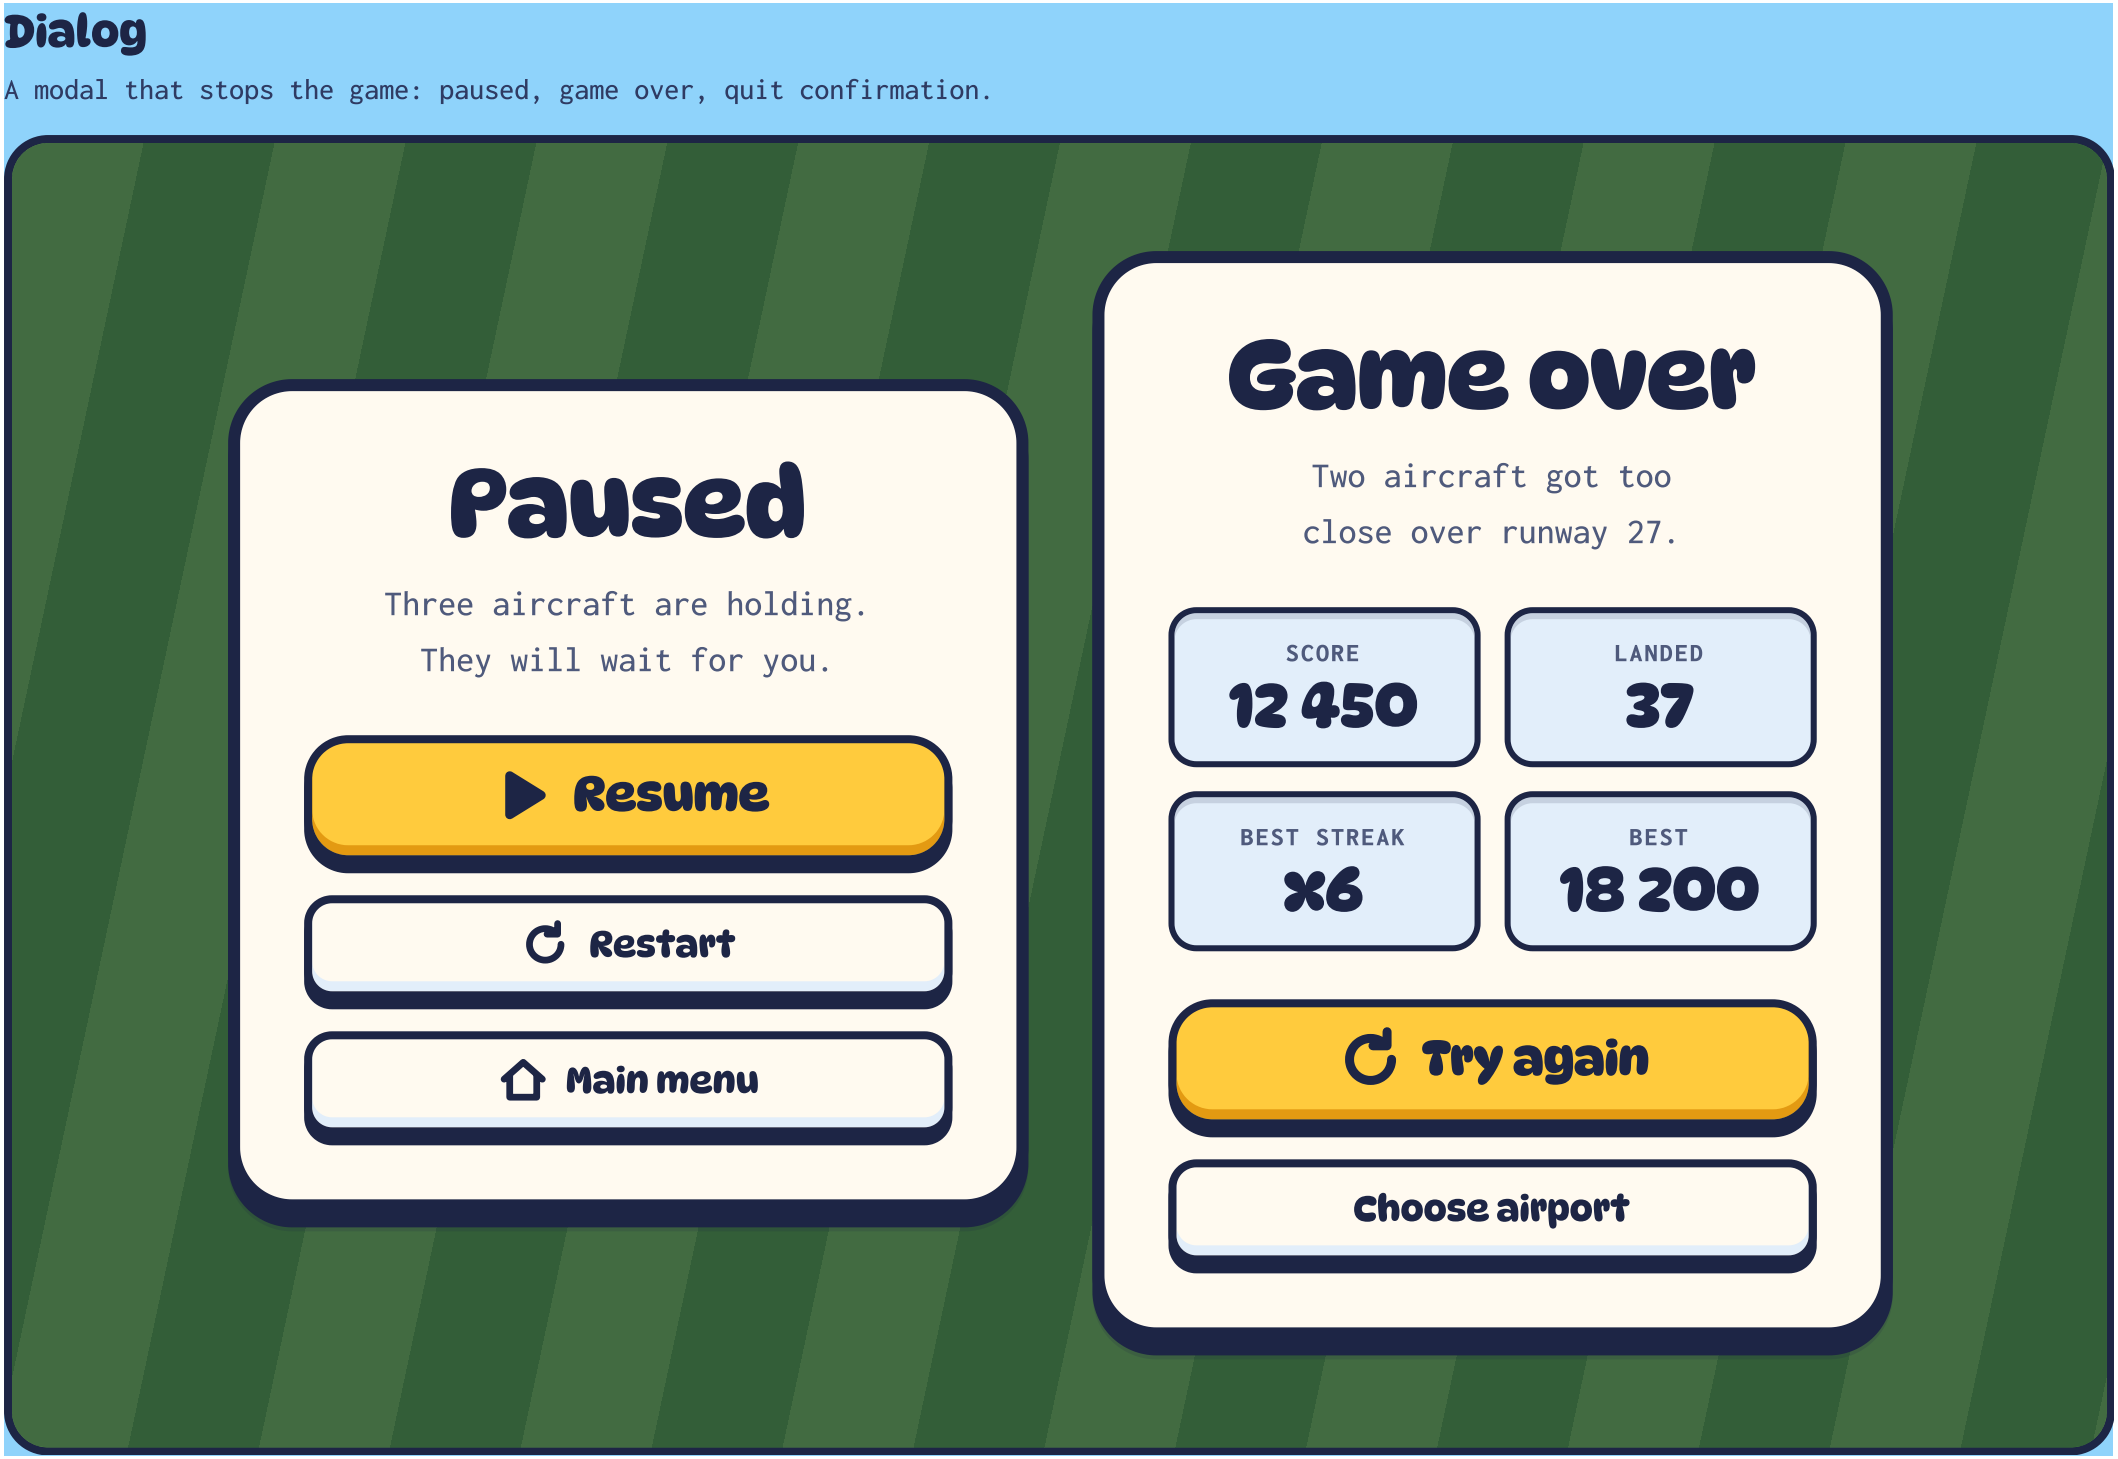

Level Card

A selectable card for one airport layout.



Meadow Field

BEST 18 200

1 runway




Twin Pines

BEST 9 750

1 runway

1 helipad

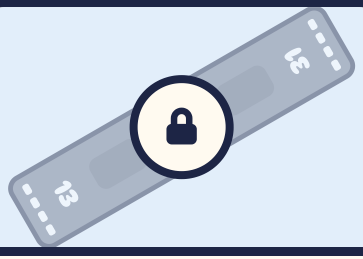


Harbour Cross

LAND 50 AIRCRAFT TO UNLOCK

Locked



Meadow Field



Island



Savanna

Coach Mark

A dark speech bubble that teaches one gesture at a time.



Wordmark

The game's name set in DynaPuff, outlined and tilted.



Brand

Banner

The banner an airplane tows across the splash page, carrying the name of the game.



REFERENCE COMPOSITIONS

Screens


Game Screen

A reference composition of a game in progress, showing how every world and HUD piece layers.




Main Menu

A reference composition of the main page: the wordmark and two buttons in front of the animated sky.

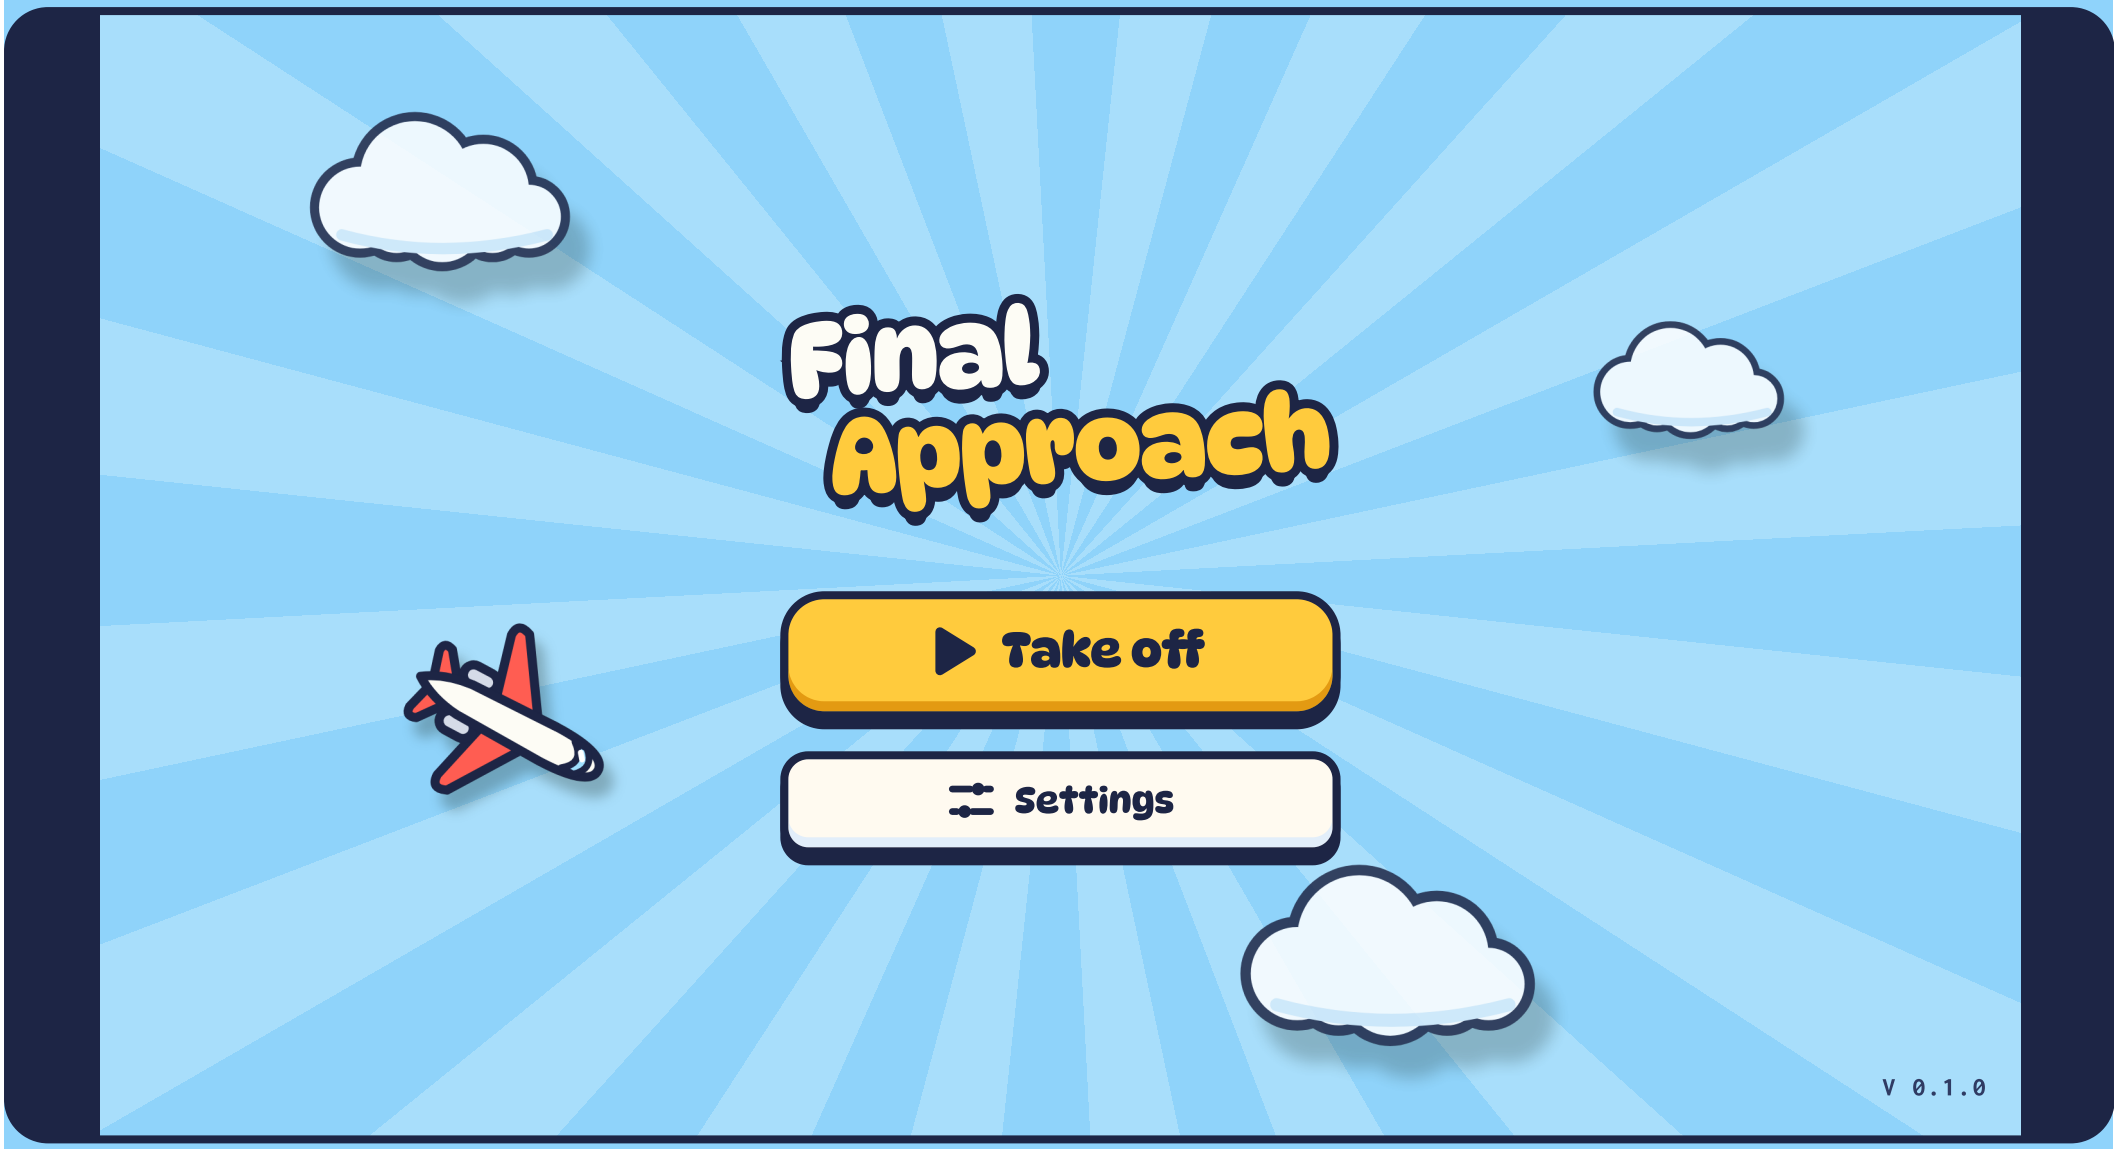

Splash Screen

A reference composition of the splash page: the first screen of the app.

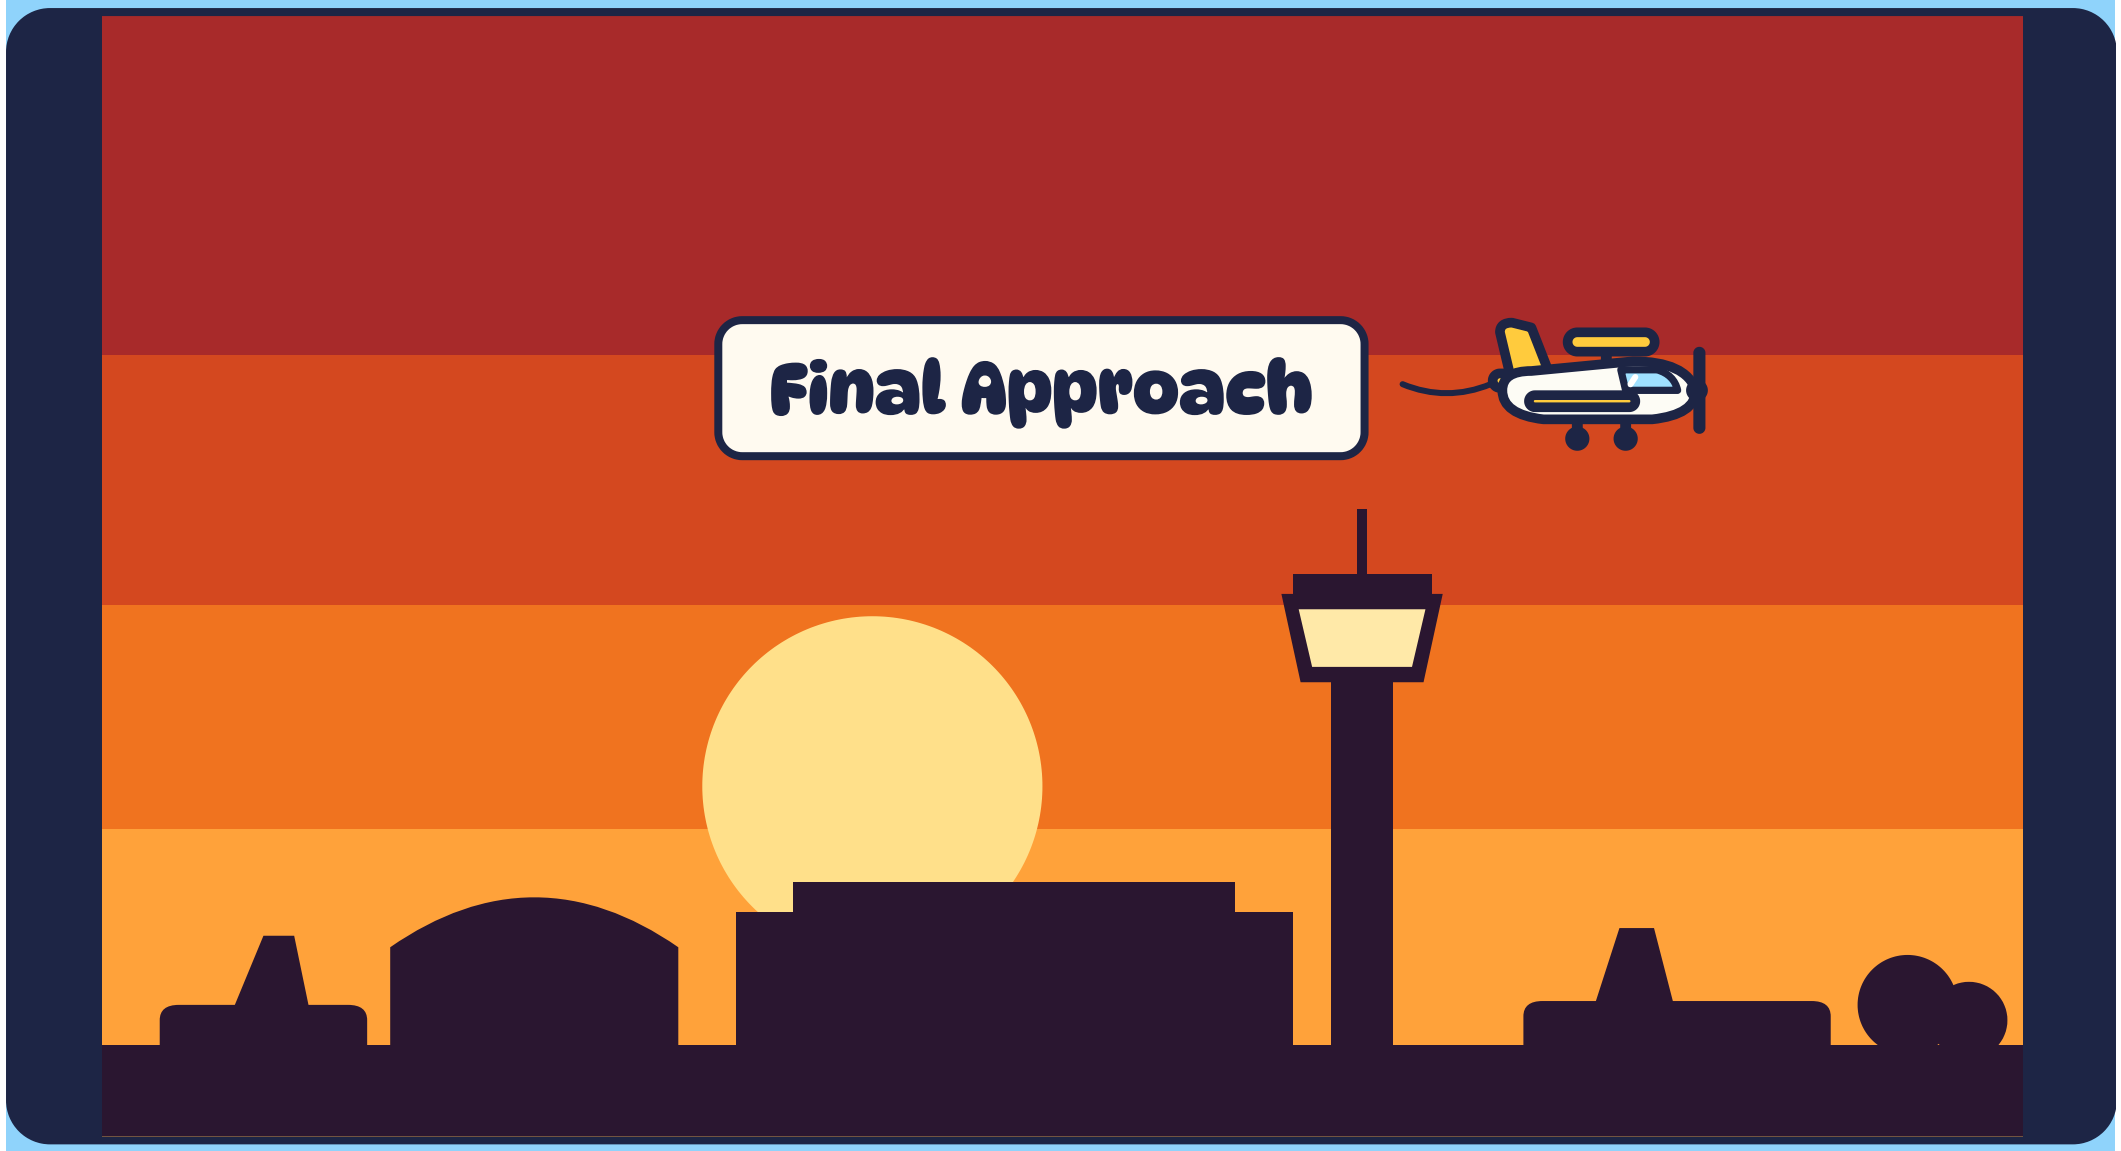

THEME

Night

Night darkens the sky and moonlights the field. Panels, chips and aircraft stay paper-light and accent fills stay bright, so outlines and labels hold.


Hud Bar

The gameplay overlay: score and streak on the left, next aircraft, lives and pause on the right.



Button

The chunky toy-block button for every text action in menus and dialogs.

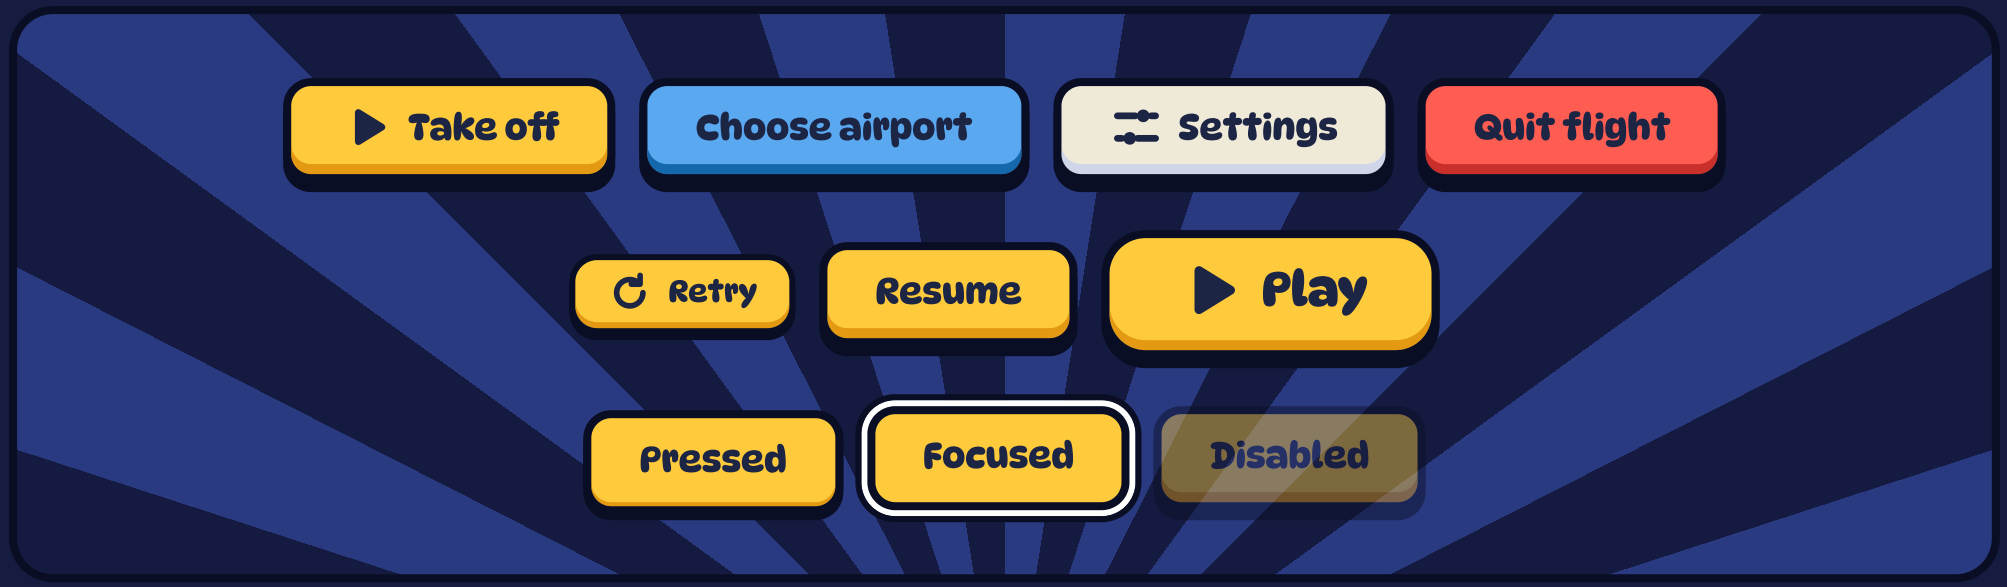


Aircraft

The five flying toys, drawn top-down with the nose pointing up at heading 0.



Game Screen

A reference composition of a game in progress, showing how every world and HUD piece layers.

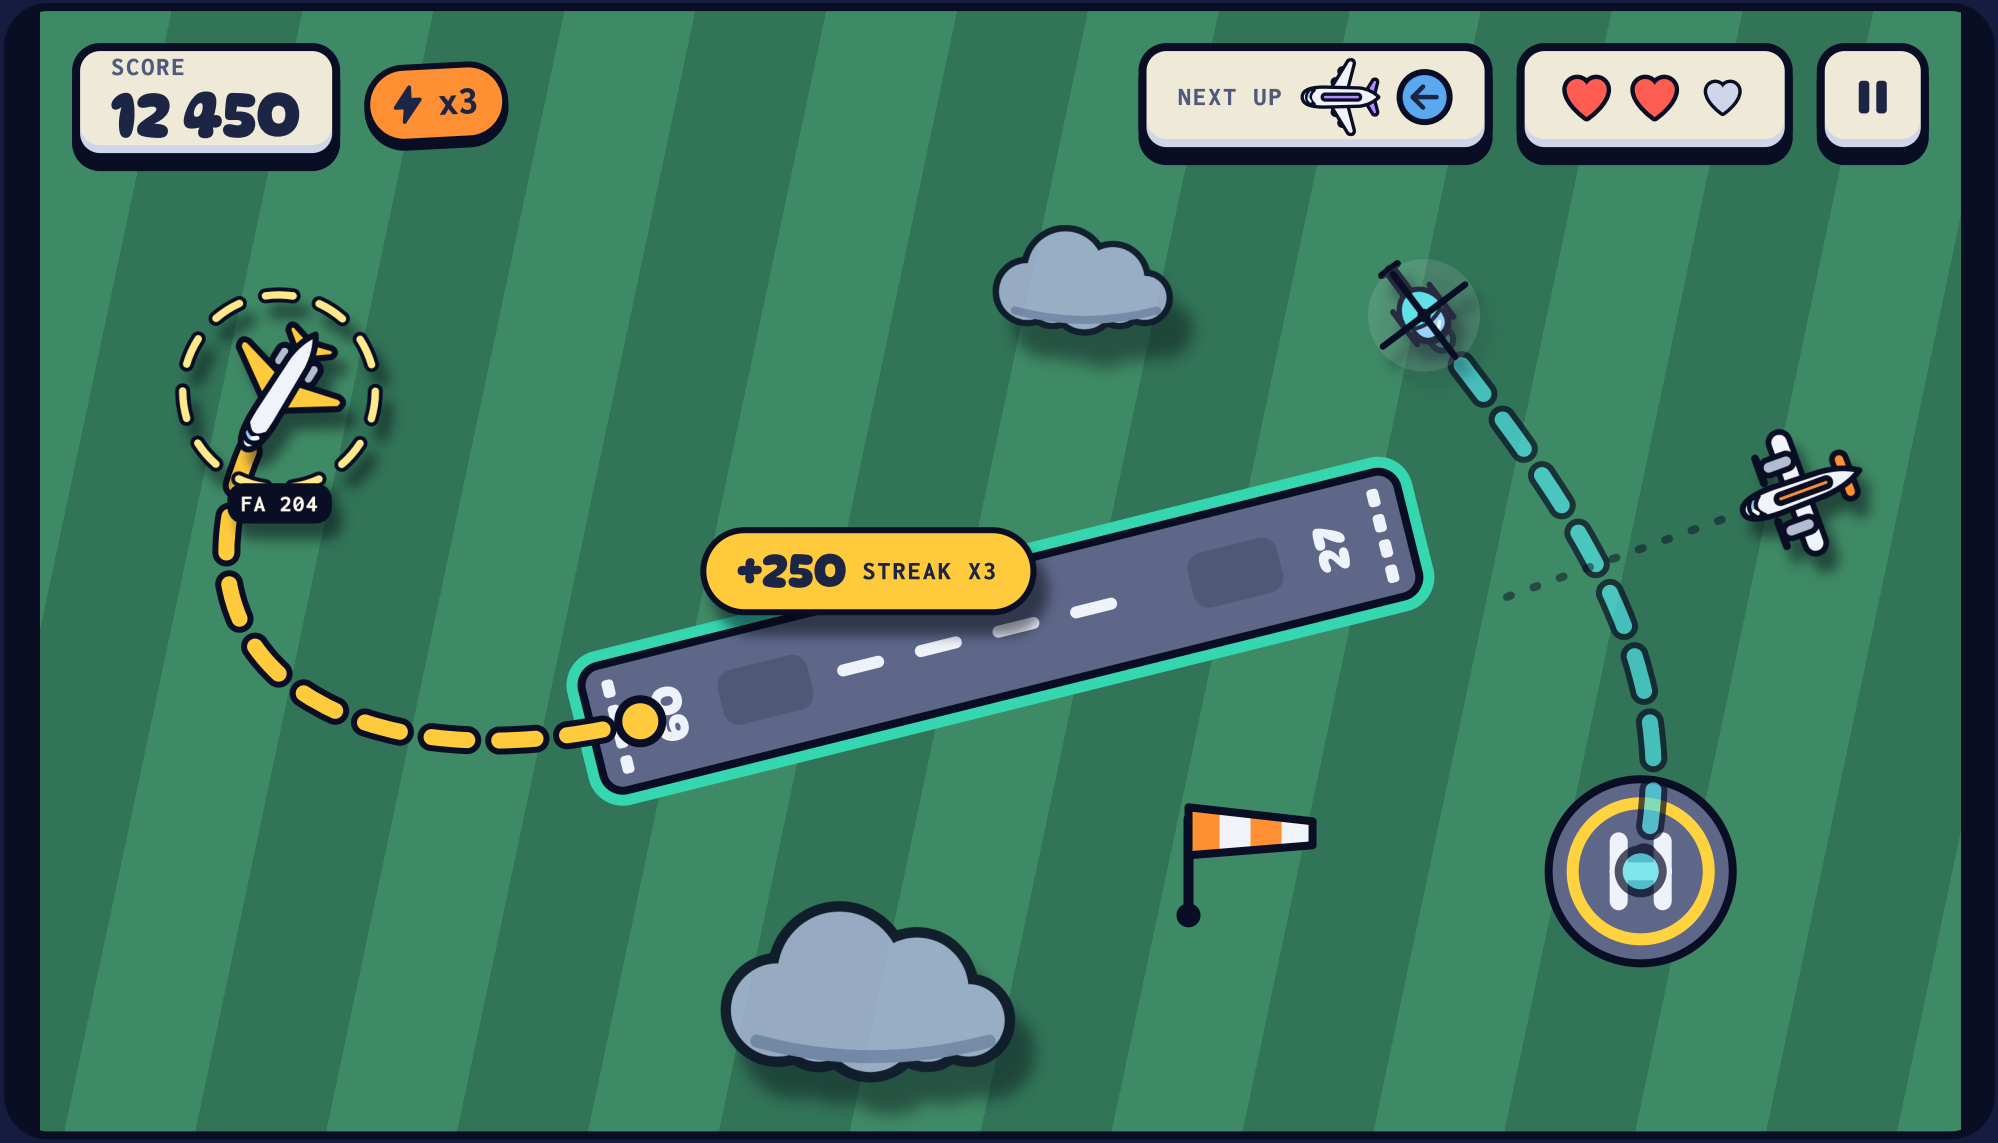

CONTENT

Voice

A friendly tower controller: short, calm, specific. Sentence case, verbs on buttons, no blame, no emoji.

- ✓ Two aircraft got too close over runway 27.
- ✗ ~~Oops! You crashed!!~~
- ✓ Try again
- ✗ ~~OK~~
- ✓ Missed
- ✗ ~~You failed to land the plane~~
- ✓ Tap an aircraft, then drag to draw its path.
- ✗ ~~Utilise touch input to define a trajectory.~~